

Site Master™

Handheld Cable & Antenna Analyzer Featuring Classic and Advanced Modes

S331L

2.0 MHz to 4.0 GHz Cable & Antenna Analyzer
50 MHz to 4.0 GHz Power Meter

Introduction

Anritsu introduces its ninth generation, compact handheld Cable & Antenna Analyzer for installation and maintenance of antenna systems.

Optimized for field use

- > 8 Hour Battery Life
- Instant On from Standby Mode
- Highest RF Immunity
- Built-in InstaCal™ Module
 - Fast, One-connection Calibration
- FlexCal™ Calibration
 - One Calibration for All Frequencies
- Built-in Power Meter
- Rugged and Reliable
- Impact, Dust, and Splash Resistant
- Smallest, Lightest Site Master™

Easy to use

- Integrated Help Function
- S331D-like Classic Mode
- S331E-like Advanced Mode
 - Additional Markers
 - Customizable Shortcuts
 - Full-screen View
- Multiple USB Ports
- 800 x 480 7" TFT Touch Screen
 - Alphanumeric Keyboard
 - EZ Name Quick Matrix
- Backlit Keypad

Efficient sweep management

- Internally Store >1000 Files
 - Sweeps, Setups, Screen Shots
- Fast Preview of Stored Sweeps
- Line Sweep Tools (LST) Software
 - Edit Sweeps, Rename, Archive
 - Generate PDF or HTML Reports
- Standard *.dat Sweep File Format
- Compatible with HHST
 - Widely Accepted by Operators
- SweepMasters DIRECT
 - Online Trace Delivery Service



Site Master™ S331L Cable & Antenna Analyzer Featuring 7.0" Daylight Viewable Touch Screen
Compact Size: 250 mm x 177 mm x 61 mm (10.0 in x 7.1 in x 2.4 in), Lightweight: < 2.0 kg (4.4 lb)


Cable and Antenna Analyzer

All specifications and characteristics apply to revision 1 instruments under the following conditions, unless otherwise stated: 1) Instrument within its recommended calibration cycle, 2) After 5 minutes of warm-up time, where the instrument has completely stabilized to the ambient temperature, 3) Internal frequency reference used, 4) Cable analyzer and VNA measurements applicable after standard OSL calibration is performed using Anritsu calibration components, 5) Typical data does not include guard band for measurement uncertainty and temperature variation and is not warranted, 6) All specifications subject to change without notice, 7) Recommended calibration cycle is 12 months.

Measurements

Measurements	VSWR Return Loss Cable Loss (One Port) Distance-to-Fault (DTF) Return Loss Distance-to-Fault (DTF) VSWR
--------------	---

Setup Parameters–Classic Mode

Measurement Display	Single Display with independent markers
Frequency	F1/F2
DTF	D1/D2, DTF Aid, Cable Loss, Propagation Velocity, Cable type
Windowing	Rectangular, Normal Side Lobe, Low Side Lobe, Minimum Side Lobe
Amplitude	Top, Bottom Auto Scale, Full Scale
Sweep	Data Points, Run/Hold, Single/Continuous, RF Immunity (High/Low)
Data Points	130, 259, 517, 1033
Markers	Markers 1 to 6 (On/Off), Delta Markers 2 to 4 (Ref M1), Marker to Peak/Valley, Marker Table, Marker 5 (Peak/Valley between M1 & M2), Marker 6 (Peak/Valley between M3 & M4)
Traces	Copy Trace To Memory, Trace Display, Trace Math
Limit Line	On/Off, Edit Value, Limit Alarm, Pass/Fail On/Off, Limit Preset
Calibration	Cal Type OSL/Standard/FlexCal™/InstaCal™
Save/Recall	Setups, Measurements, Screen Shots

Setup Parameters–Advanced Mode

Measurement Display	Single Display with independent markers
Frequency	Start Frequency (F1), Stop Frequency (F2)
DTF	Start Distance (D1), Stop Distance (D2), Units m/ft, DTF Aid, Cable List, Cable Loss, Propagation Velocity
Windowing	Rectangular, Normal Side Lobe, Low Side Lobe, Minimum Side Lobe
Amplitude	Top, Bottom, Auto Scale, Full Scale
Sweep	Data Points, Run/Hold, Single/Continuous, RF Immunity (High/Low)
Data Points	130, 259, 517, 1033
Markers	Markers 1 to 8 (On/Off), Delta Markers 2 to 8 (Ref M1), Marker to Peak/Valley, Marker Table, Marker 5 & 7 (Peak/Valley between M1 & M2), Marker 6 & 8 (Peak/Valley between M3 & M4)
Traces	Copy Trace to Memory, Trace Display, Trace Math
Limit Line	On/Off, Edit Value, Limit Alarm, Pass/Fail On/Off, Limit Preset
Calibration	Cal Type OSL/Standard/FlexCal™/InstaCal™
Save/Recall	Setups, Measurements, Screen Shots

Frequency

Frequency Range	2 MHz to 4 GHz
Frequency Accuracy	± 5 ppm @ 23 °C ± 3 °C
Frequency Resolution	1 kHz

Power

Output Power	+3 dBm, typical
--------------	-----------------

Interference Immunity

On-Channel	+17 dBm outside calibrated sweep range
On-Frequency	+13 dBm within calibrated sweep range

Measurement Speed

Return Loss	≤ 1.50 ms/data point, RF immunity low, typical
Distance-to-Fault	≤ 1.75 ms/data point, RF immunity low, typical



Cable and Antenna Analyzer (continued)

Return Loss

Measurement Range Resolution 0 to 60 dB
0.01 dB

VSWR

Measurement Range 1 to 65
Resolution 0.01

Cable Loss

Measurement Range 0 to 30 dB
Resolution 0.01 dB



Distance-to-Fault

Vertical Range Return Loss 0 to 60 dB
Vertical Range VSWR 1 to 65
Fault Resolution (meters) $(1.5 \times 10^8 \times v_p) / \Delta F$ (v_p = propagation velocity, ΔF is $F_2 - F_1$ in Hz)
Horizontal Range (meters) 0 to (Data Points - 1) x Fault Resolution, to maximum of 1500 meters (4921 feet)

Measurement Accuracy

@ 23 °C ± 3 °C
Corrected Directivity ≥ 38 dB, InstaCal™ calibration
≥ 42 dB, OSL calibration (OSLN50-1, OSLNF50-1)

Return Loss Measurement Uncertainty

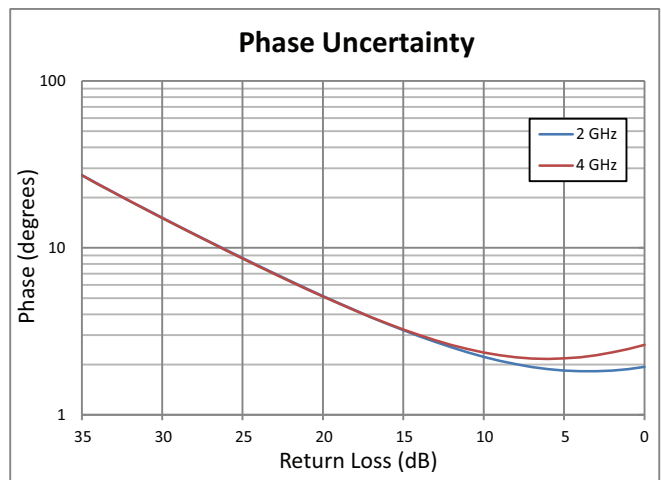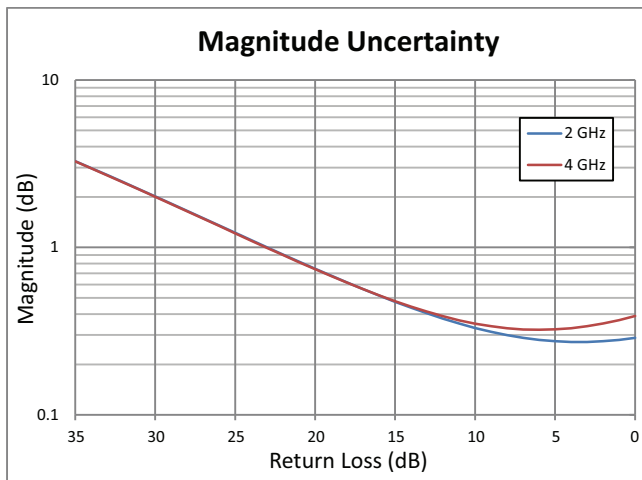

Internal Power Meter

Amplitude	Maximum, Minimum, Offset, Relative On/Off, Units, Auto Scale
Average	Running Average, Max Hold On/Off, Run/Hold, Average Mode Cont/Single
Limits	Limit On/Off, Limit Upper/Lower
Frequency Range	50 MHz to 4 GHz
Display Range	-100 dBm to +100 dBm
Measurement Range	-33 dBm to +20 dBm
Offset Range	Max ± 100 dB, user settable value
VSWR	1.5:1 typical
Maximum Power	+27 dBm, ± 45 VDC (damage level)
Connector	Type N(m), 50 Ω
Accuracy	± 0.7 dB (0 dBm, 1 GHz CW, @ 23 °C ± 3 °C)
Frequency Response and Linearity	Additional ± 0.8 dB (± 0.5 dB typical)
Temperature Effect	Additional ± 0.02 dB per 1 °C change (typical)

General Specifications

Setup Parameters

System Info	Status, Battery
System Setups	Date/Time, Language, Display/Audio
Date/Time	Day, Month, Year, Time
Language	English, French, German, Italian, Spanish, Russian, Portuguese, Japanese, Korean, Chinese
Display/Audio	Brightness, Color Schemes, Screen Shot Settings, Volume
Diagnostics	Self Test
Preset	Preset, Reset
Reset	Factory Reset, Master Reset, Update Firmware
File	Save, Recall, File Management
File Management	Rename, Create Folder, Copy, Paste, Delete, Navigation
Navigation	Top, Bottom, Page Up, Page Down
Save	Measurement (*.dat), Setup (*.stp), Screen Shot (*.png)
Internal Trace/Setup Memory	> 1000 files (files may be traces, setups, screen shots, or any combination)
External Trace/Setup Memory	Limited only by size of USB Flash drive

Connectors

RF Out/Reflect In	Type N, female, 50 Ω, Maximum Input +23 dBm, ± 50 VDC
InstaCal™/Power Meter	Type N, male, 50 Ω, Maximum Input +27 dBm, ± 45 VDC (Damage Level)
External Power	5.5 mm barrel connector, 11 to 14 VDC, < 3.0 A
USB Ports	USB 2.0 Type A (two ports)
USB Interface	Type mini-B, Connect to PC for data transfer

Display

Type	TFT Resistive Touch Screen
Size	7.0" daylight viewable color LCD
Resolution	800 x 480

Battery

Type	Li-Ion
Battery Operation	> 8.0 Hours typical (70 % brightness setting, continuous usage)

Electromagnetic Compatibility

European Union	CE Mark, EMC Directive 89/336/EEC, 92/31/EEC, 93/68/EEC and Low Voltage Directive 73/23/EEC, 93/68/EEC
Interference	EN 61326-1
Emissions	EN 55011
Immunity	EN 61000-4-2/-4-3/-4-4/-4-5/-4-6/-4-11
Australia and New Zealand	C-tick N274

Safety

Safety Class	EN 61010-1 Class 1
Product Safety	IEC 60950-1 when used with Company supplied Power Supply

Environmental

Operating Temperature	-10 °C to +55 °C
Maximum Humidity	95 % non-condensing
Altitude	4600 meters
Shock	MIL-PRF-28800F Class 2
Storage	-40 °C to 71 °C

Size and Weight

Size	250 mm x 177 mm x 61 mm (10.0 in x 7.1 in x 2.4 in)
Weight	< 2.0 kg (4.4 lb), including battery

 **Anritsu Tool Box and Line Sweep Tools** (for your PC)

Line Sweep Tools (LST) is a free PC based program that increases productivity for people who deal with numerous Cable and Antenna traces every day. LST is the next generation of Anritsu's familiar Handheld Software Tools (HHST) and shares its uncomplicated user interface, giving a new face to the term "ease of use."

Cable Editor ¹	Instrument Cable Lists may be retrieved from the instrument, modified as required, and uploaded back into instrument.
Distance to Fault ² (DTF)	Easily convert Return Loss or VSWR traces to Distance to Fault traces with one button press.
Measurement Calculator	Provides quick conversion between commonly used measurement units such as VSWR, RL, and others.
Signal Standard Editor ¹	Signal Standard Lists may be retrieved from the instrument, modified as required, and uploaded back into instrument.
Naming Grid	A naming grid function makes changing file names, trace titles, and trace subtitles from field values to those required by contract simple and quick. Once the naming grid is populated with user defined file name segments, a few simple button presses will then fill out the file, title, and sub-title names. Quickly applied to multiple traces, the naming grid can save time, increase efficiency and accuracy.
Presets	Presets make applying markers and a limit line to similar traces quick and easy. They only need to be set once, and recorded. After this, applying them to a similar trace requires only one button push. This speeds up trace processing and makes providing consistent marker and limit line settings easy.
Report Generator	The report generator creates a professional PDF or HTML based report. Reports may include GPS ³ location, power level ³ , company logo ⁴ , instrument and calibration status along with a display of all open traces. It also may contain additional information such as addresses and phone numbers.
Capture	Plots to Screen, Database, *.dat, *.jpg
Connect	To PC using USB, Ethernet, Serial
Download/Upload ¹	Lists/measurements and live traces to PC for storage and analysis.
Supported File Types	Input: *.dat, *.vna, *.mna, *.pim, *.tm Output: *.dat, *.vna, *.pim, *.tm, *.csv, *.bmp, *.jpg, *.png

SweepMasters DIRECT

SweepMasters DIRECT is an easy-to-use online trace delivery service for your S331L cable and antenna analyzer traces. When used with the S331L, it allows you to capture, upload, and deliver traces.

Standard Functions	Create Groups, Modify Groups, Create Sites, Modify Sites, View Sites, Create Users, Modify Users, Add Users, Modify Company Profile, Upload Traces, View Trace list, Send Traces
Supported File Types	S331L *.dat file format
Export Data	Send download link from selected Site to recipients via email. Download link contains single zip file. Zip file contains all of the selected Site uploaded *.dat files and a pdf containing plots of the included *.dat files.

1. Instrument type/model must match original
 2. Only *.dat and *.vna file types supported
 3. Model dependent
 4. Optionally set by user

Ordering Information

Model Number

S331L

Description



Includes all items listed in the description

Cable and Antenna Analyzer - 2 MHz to 4 GHz
Internal InstaCal™ - 2 MHz to 4 GHz
Internal Power Meter - 50 MHz to 4 GHz

Calibration and Extended Warranty Options

Warranty

Warranty with Z540 Calibration

Description

S331L-ES210

N/A

Warranty Extension to 2 Years, Return to Anritsu

S331L-ES310

S331L-ES313

Warranty Extension to 3 Years, Return to Anritsu

S331L-ES510

S331L-ES513

Warranty Extension to 5 Years, Return to Anritsu

Calibration Only Options

Option

Description

S331L-0098

Standard Calibration to Z540

S331L-0099

Premium Calibration to Z540 plus test data

Other Site Master™ Models From Anritsu (more data available at www.anritsu.com)

S331E
2 MHz to 4 GHz



S361E
2 MHz to 6 GHz



Cable & Antenna Analyzer Features

2 MHz to 4 GHz (S331E), 2 MHz to 6 GHz (S361E)
2204 Data Points, 8.4" TFT Touch Screen, Dual Display Capability, Smith Chart Display
Optional 2-port Tx Measurements
Optional GPS
Optional Bias Tee
Optional High Accuracy Power Meter (requires external USB sensor sold separately)

Cable & Antenna Analyzers

S332E
2 MHz to 4 GHz
100 kHz to 4 GHz SPA



S362E
2 MHz to 6 GHz
100 kHz to 6 GHz SPA



Cable & Antenna Analyzer Features


2 MHz to 4 GHz (S332E), 2 MHz to 6 GHz (S362E)
2204 Data Points, 8.4" TFT Touch Screen, Dual Display Capability, Smith Chart Display
Optional 2-port Tx Measurements
Optional GPS
Optional Bias Tee
Optional High Accuracy Power Meter (requires external USB sensor sold separately)

Cable & Antenna Analyzers with Integrated Spectrum Analyzer


Spectrum Analyzer Features

100 kHz to 4 GHz (S332E), 100 kHz to 6 GHz (S362E)
Optional Interference Analysis with Interference Mapping Spectrogram, Signal ID
Optional Coverage Mapping
Optional AM/FM/PM Analysis
Optional Channel Scanner

S810D
2 MHz to 10.5 GHz



S820D
2 MHz to 20 GHz



Microwave Cable & Antenna Analyzer Features

2 MHz to 10.5 GHz (S810D) 2 MHz to 20 GHz (S820D)
Available 2-port Transmission Measurements
Supports Waveguide Measurements

Microwave Cable & Antenna Analyzers

Standard Accessories

(included with instrument)




Part Number	Description
10920-00060	Handheld Instruments Documentation Disc
2300-530	Anritsu Tool Box with Line Sweep Tools (LST) DVD Disc
11410-00616	Site Master™ S331L Technical Data Sheet
10580-00321	Site Master™ S331L User Guide (Hard copy)
2000-1676-R	Soft Carrying Case
2000-1691-R	Stylus with Coiled Tether
2000-1687-R	Torque Multiplier N(m)
40-187-R	AC-DC Adapter
806-141-R	Automotive Cigarette Lighter 12 VDC Adapter
3-2000-1498	USB A/5-pin mini-B Cable, 305 cm (120 in)
	One Year Warranty
	Certificate of Calibration and Conformance

Recommended Spare Accessories (not included)



Part Number	Description
2000-1691-R	Replacement Stylus with coiled tether
2000-1687-R	Replacement Torque Multiplier N(m)

Manuals

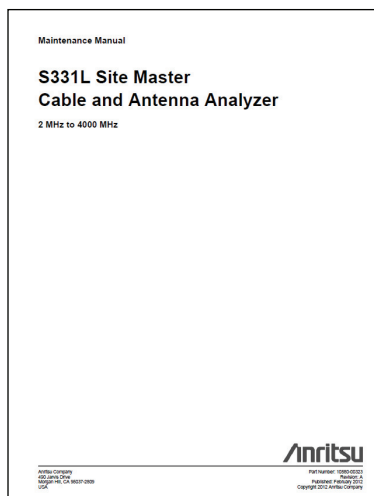

Part Number	Description
10580-00253	Site Master™ S331L Maintenance Manual

Optional Accessories

Calibration Components, 50 Ω



Part Number	Description
OSLN50-1	Precision Open/Short/Load, N(m), 42 dB, 6.0 GHz, 50 Ω
OSLNF50-1	Precision Open/Short/Load, N(f), 42 dB, 6.0 GHz, 50 Ω
2000-1618-R	Precision Open/Short/Load, 7/16 DIN(m), DC to 6.0 GHz 50 Ω
2000-1619-R	Precision Open/Short/Load, 7/16 DIN(f), DC to 6.0 GHz 50 Ω
22N50	Open/Short, N(m), DC to 18 GHz, 50 Ω
22NF50	Open/Short, N(f), DC to 18 GHz, 50 Ω
SM/PL-1	Precision Load, N(m), 42 dB, 6.0 GHz
SM/PLNF-1	Precision Load, N(f), 42 dB, 6.0 GHz

Calibration Components, 75 Ω



Part Number	Description
12N50-75B	Matching Pad, DC to 3 GHz, 50 Ω to 75 Ω
22N75	Open/Short, N(m), DC to 3 GHz, 75 Ω
22NF75	Open/Short, N(f), DC to 3 GHz, 75 Ω
26N75A	Precision Termination, N(m), DC to 3 GHz, 75 Ω
26NF75A	Precision Termination, N(f), DC to 3 GHz, 75 Ω

Adapters



Part Number	Description
510-90-R	7/16 DIN(f) to N(m), DC to 7.5 GHz, 50 Ω
510-91-R	7/16 DIN(f) to N(f), DC to 7.5 GHz, 50 Ω
510-92-R	7/16 DIN(m) to N(m), DC to 7.5 GHz, 50 Ω
510-93-R	7/16 DIN(m) to N(f), DC to 7.5 GHz, 50 Ω
510-96-R	7/16 DIN(m) to 7/16 DIN(m), DC to 7.5 GHz, 50 Ω
510-97-R	7/16 DIN(f) to 7/16 DIN(f), DC to 7.5 GHz, 50 Ω
1091-379-R	7/16 DIN(f) to 7/16 DIN(f), DC to 6 GHz, 50 Ω with Reinforced Grip
510-102-R	N(m) to N(m), DC to 11 GHz, 50 Ω, 90 degrees right angle
1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
1091-172-R	BNC(f) to N(m), DC to 1.3 GHz, 50 Ω

Precision Adapters



Part Number	Description
34NN50A	Precision Adapter, N(m) to N(m), DC to 18 GHz, 50 Ω
34NFN50	Precision Adapter, N(f) to N(f), DC to 18 GHz, 50 Ω

Attenuators



Part Number	Description
3-1010-122	20 dB, 5 W, DC to 12.4 GHz, N(m) to N(f)
42N50-20	20 dB, 5 W, DC to 18 GHz, N(m) to N(f)
42N50A-30	30 dB, 50 W, DC to 18 GHz, N(m) to N(f)
3-1010-123	30 dB, 50 W, DC to 8.5 GHz, N(m) to N(f)
1010-127-R	30 dB, 150 W, DC to 3 GHz, N(m) to N(f)
3-1010-124	40 dB, 100 W, DC to 8.5 GHz, N(m) to N(f), Unidirectional
1010-121	40 dB, 100 W, DC to 18 GHz, N(m) to N(f), Unidirectional
1010-128-R	40 dB, 150 W, DC to 3 GHz, N(m) to N(f)

Optional Accessories (continued)

Phase-Stable Test Port Cables, Armored w/ Reinforced Grip (recommended for cable & antenna line sweep applications)



Part Number	Description
15RNFN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15RDFN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15RDN50-1.5-R	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
15RNFN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15RDFN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15RDN50-3.0-R	3.0 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω

Interchangeable Adapter Phase Stable Test Port Cables, Armored w/Reinforced Grip (recommended for cable and antenna line sweep applications. It uses the same ruggedized grip as the reinforced grip series cables. Now you can also change the adapter interface on the grip to four different connector types)



Part Number	Description
15RCN50-1.5-R	1.5 m, DC to 6 GHz, N(m), N(f), 7/16 DIN(m), 7/16 DIN(f), 50 Ω
15RCN50-3.0-R	3.0 m, DC to 6 GHz, N(m), N(f), 7/16 DIN(m), 7/16 DIN(f), 50 Ω

Phase-Stable Test Port Cables, Armored (ideal for use with tightly spaced connectors and other general use applications)



Part Number	Description
15NNF50-1.5C	1.5 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-1.5C	1.5 m, DC to 6 GHz, N(m) to N(m), 50 Ω
15NDF50-1.5C	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(f), 50 Ω
15ND50-1.5C	1.5 m, DC to 6 GHz, N(m) to 7/16 DIN(m), 50 Ω
15NNF50-3.0C	3.0 m, DC to 6 GHz, N(m) to N(f), 50 Ω
15NN50-3.0C	3.0 m, DC to 6 GHz, N(m) to N(m), 50 Ω

Backpack and Transit Case



Part Number	Description
67135	Anritsu Backpack (For Handheld Instrument and PC)
760-256-R	Large Transit Case with Wheels and Handle



The Master Users Group is an organization dedicated to providing training, technical support, networking opportunities and links to Master product development teams. As a member you will receive the Insite Quarterly Newsletter with user stories, measurement tips, new product news and more.

Visit us to register today: www.anritsu.com/mug



To receive a quote to purchase a product or order accessories visit our online ordering site: www.ShopAnritsu.com

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses visit: www.anritsu.com/training



• United States

Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,
TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP - Brasil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU,
U.K.
Phone: +44-1582-433280
Fax: +44-1582-731303

• France

Anritsu S.A.

12 Avenue du Québec,
Bâtiment Iris 1-Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49 (0) 89 442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

• Sweden

Anritsu AB

Borgafjordsgatan 13A, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S (for Service Assurance)

Anritsu AB (for Test & Measurement)
Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech
(Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu Pte. Ltd.

India Branch Office

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,
Indiranagar, 100 ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

Room 1715, Tower A CITY CENTER of Shanghai,
No.100 Zunyi Road, Chang Ning District,
Shanghai 200051, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P. R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia
Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016
Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

• Korea

Anritsu Corporation, Ltd.

502, 5FL H-Square N B/D, 681
Sampyeong-dong, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill
Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817



© Anritsu All trademarks are registered trademarks of their respective companies. Data subject to change without notice. For the most recent specifications visit: www.anritsu.com
Anritsu prints on recycled paper with vegetable soybean oil ink.

S331L Site Master™ TDS
Copyright June 2012 Anritsu Company, USA
All Rights Reserved



11410-00616



B